


VRS 4.1 for Fujitsu scanner (PFU OEM Bundle) Service Pack 2 Notes. (For fi-4860C2/5900C)

1. The usage of Service pack2 (SP2)


(a) Service Pack2 (SP2) file name : vrs_4.1_sp2_pfu_oem_4860_5900.exe

(b) How to install



- Log in as Administrator.
- Locate the downloaded SP2 file onto Desktop and execute the file. After the execution of the file a new folder (VRS4.1_SP2_HVRS) will be created in Desktop.
- Execute setup.exe from the new folder and start up the installer (make sure beforehand that VRS4.1 is not operating).
 - * Refer to “2. Precautions” when installing VRS from Vista Enterprise/Business.
- Follow instructions from the installer window and proceed.
- Select a scanner from the list when the windows below appear.

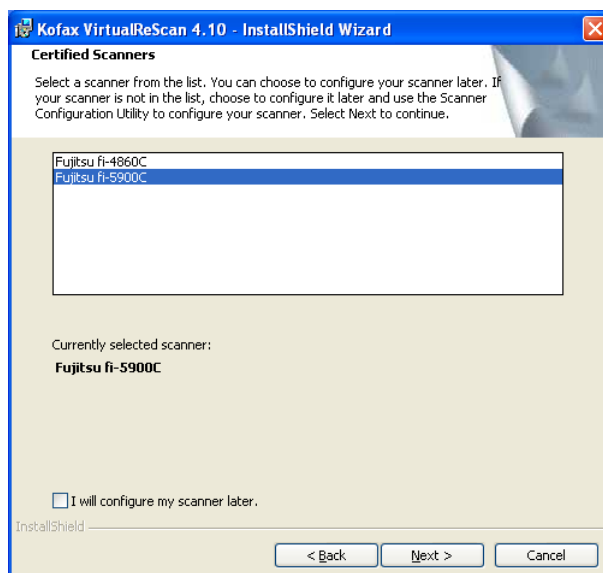




- As the following window appears, click on “Install” and begin the installation.

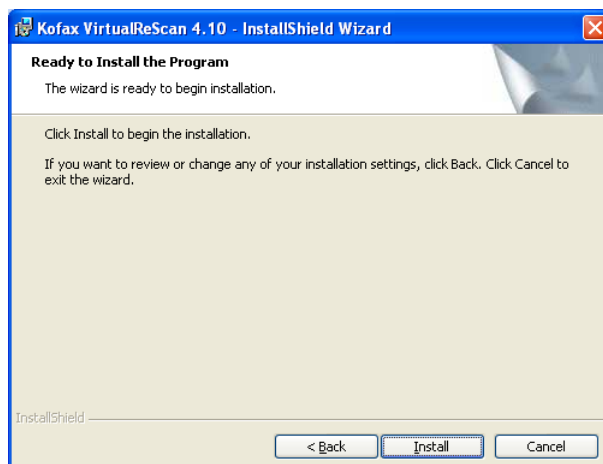

- When the following window is displayed, click on “Finish”.
Then click on “Yes” to restart the system.

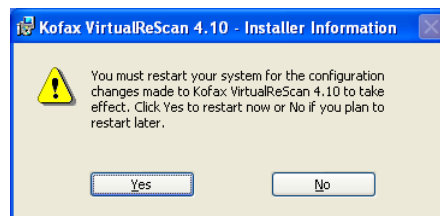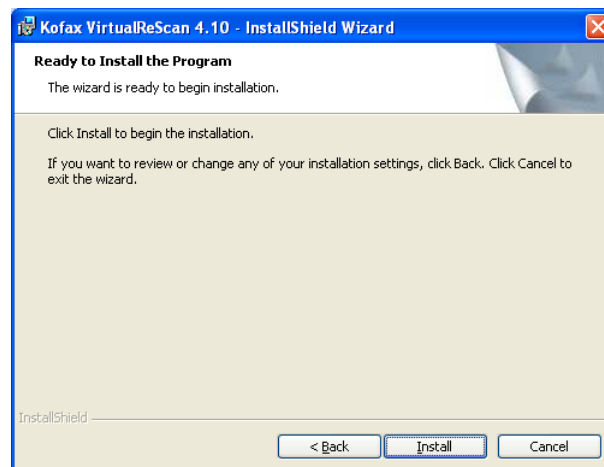

- After restarting the system, select “Skip Registration” and click on “Yes”.
Also click on “Close” when the VRS Updater Manager window is displayed.

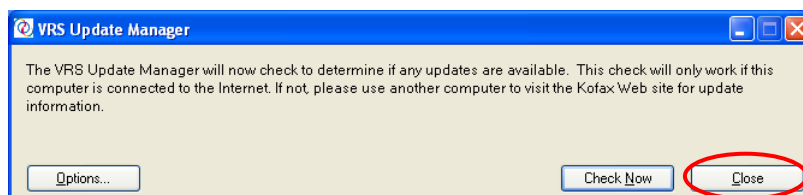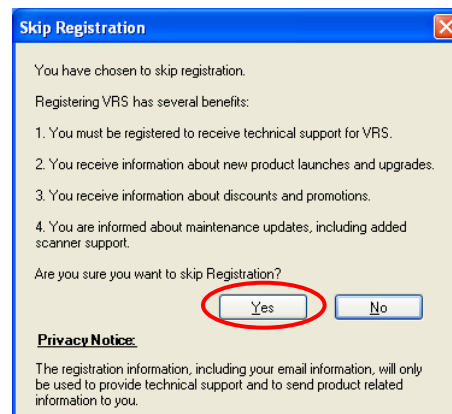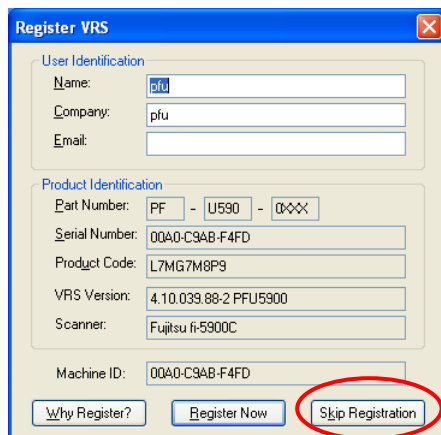

- Version description : The version description will be changed to “4.10.039.88-2 PFU5900”.
- * It will be the same description “4.10.039.88-2 PFU5900” for fi-4860C2



(VRS 4.1 PFU OEM Bundle)




(VRS 4.1 SP2 PFU OEM Bundle)

2. Precautions

In order to install VRS in a Windows Vista Enterprise/Vista Business environment, you need to disable the User Account Control setting before installing. Please disable it by the following procedures.

- Open “User Accounts” from “Control Panel”.
 - Select “Turn User Account Control on or off”.
 - Untick the “Use User Account Control (UAC) to help protect your computer” box.*
 - Restart your PC.
- * whether it remains ticked or unticked in the end does not affect the operation.

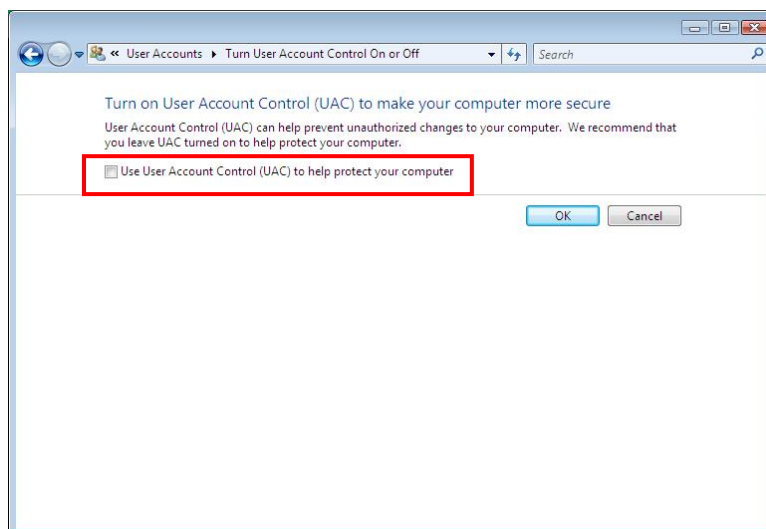

(Above: User Account Control setting disabled)